

CM 12



The latest line extension in the award-winning MovinCool line of spot coolers is the CM12, ceiling-mounted packaged air conditioner. Featuring the shortest top-to-bottom profile in the industry, the CM12 fits into virtually any drop-ceiling, making it the perfect cooling solution for server rooms with limited floor space.

Where It's Used

Small server rooms, telecom closets, off-season spot cooling, overhead spot cooling, supplemental cooling, hotels or anywhere floor space is limited.



- 10,500 Btu/h at 80°F 50% RH (Evaporator)
95°F 40% RH (Condenser)
- 13,000 Btu/h at 95°F 60% RH
- 115V, 15 amps - no special electric required
- No floor space needed
- Can fit into tight ceiling spaces

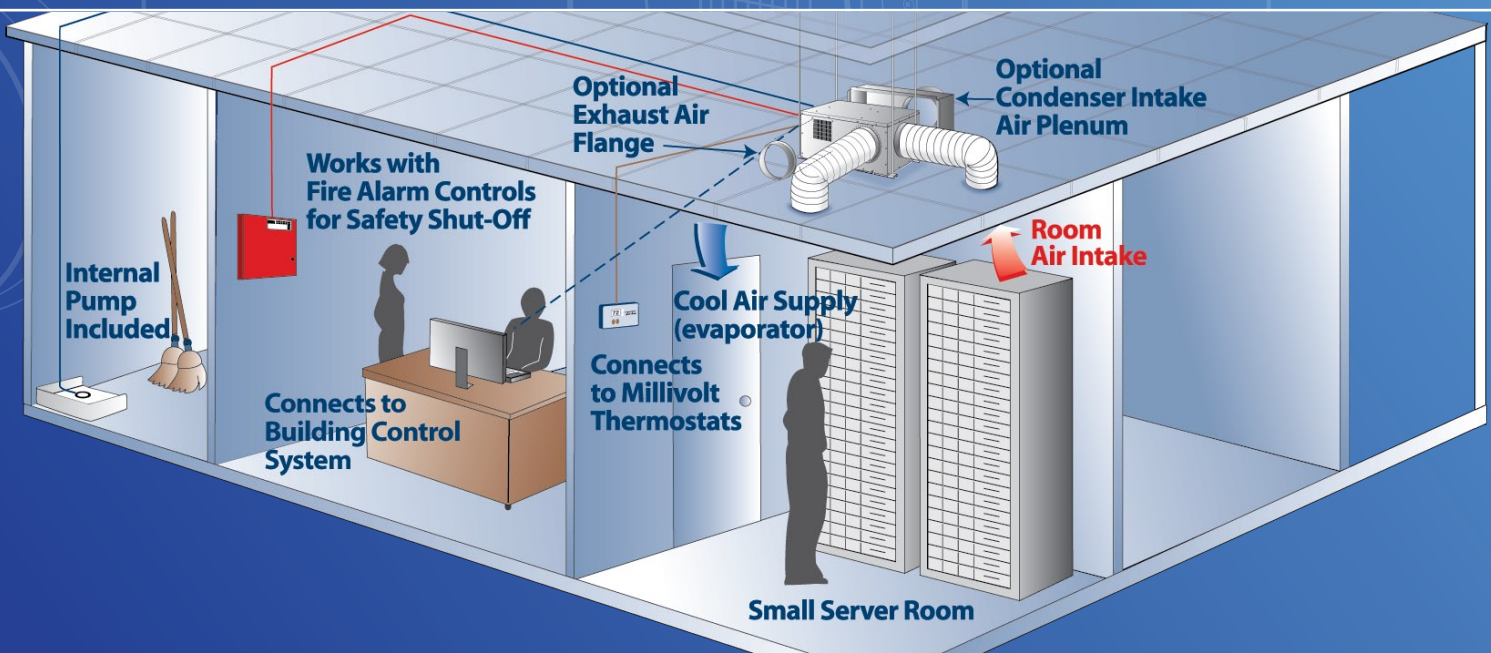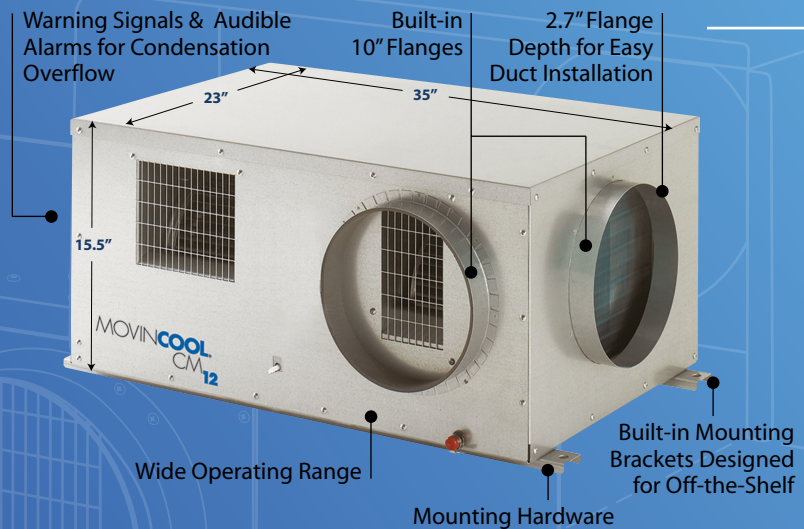

MOVINCOOL®

THE #1 SPOT COOLING SOLUTION

800.264.9573

www.movincool.com

DENSO SALES CALIFORNIA, Inc. 3900 Via Oro Ave. Long Beach, CA 90810



Technical Specs		CM12
Electronic Features	Control Panel Thermostat Control	Electronic Millivolt (Not Included)
Cooling Capacity	80°F 50% RH (Evaporator) 95°F 40% RH (Condenser)	10,500 Btu/h ^{1,2}
Electrical Characteristics	Voltage Requirements Total Power Consumption Current Consumption Recommended Fuse Size NEMA Plug Configuration Min. – Max. Voltage	1 Phase, 115V 1.23 kW ¹ 11.9 amps ¹ 15 amps N/A 105 - 125
Fans	Motor Output - high/low	0.04/0.013 kW (Evaporator) 0.1/0.025 kW (Condenser)
Evaporator	Fan Type Max. Air Flow - high/low Max. External Static Pressure	Centrifugal 324/228 CFM ¹ 0.16 IWG
Condenser	Fan Type Max. Air Flow - high/low Max. External Static Pressure	Centrifugal 700/370 CFM 0.12 IWG
Compressor	Type Output	Hermetic Rotary 0.89 kW
Refrigerant	Type	R-22/R-410A*
Dimensions	W x D x H	35 x 23 x 15.5 in
Net Weight/Shipping Weight		128/141 lb
Power Cord	Gauge/Length	N/A / N/A
Condensate Tank Capacity		Auto Pump Included
Operating Conditions	Min. – Max. (@ 50% RH)	65° - 95°F (Evaporator) 65° - 113°F (Condenser)
Max. Equivalent Duct Length	Per Cold Duct Hose Hot Duct Hose	20 ft ³ 10 ft ³
Max. Sound Level	With Condenser - Duct high/low Without Condenser - Duct high/low	52 dB(A) N/A

¹ Measured with two 6 ft ducts with one 90° bend each, supply grill and return grill with filter (0.16 IWG external static pressure) (ducts not included)

² Ambient condition for rating: Evaporator: 80°F 50%RH / Condenser: 95°F 40%RH

³ Confirm pressure drop of duct, grills and filter with manufacturer's specifications (ducts not included)

* Check manufacturer or reseller for refrigerant type

All specifications subject to change without notice.

© 2010 DENSO SALES CALIFORNIA, INC. MovinCool, SpotCool and Office Pro are registered trademarks of DENSO Corporation.

360-0110-CM12